


Description:

The Solar Series 2' x 2' Eclipse Ambient LED Light offers all the functionality of the 2' x 4' version but in a smaller package. This is convenient where other elements in the ceiling can interfere with the light such as a patient lift or pendant system.

Features:

- Hospital grade material and finish
- Glare-free reflectors
- Optional amber night light
- Long lasting LEDs
- Seam welded enclosure

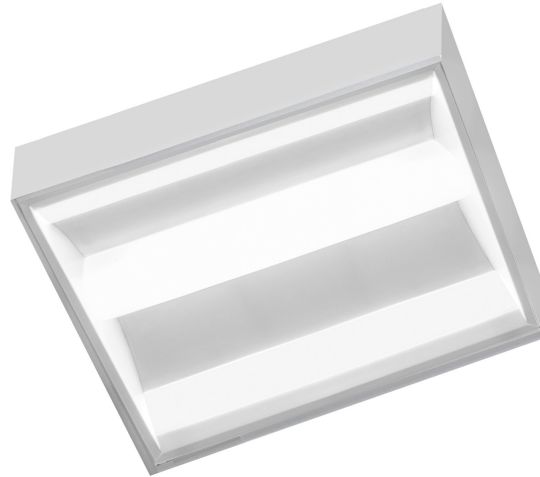

Construction Material:

Housing: 20ga CRS, single piece, seam welded construction.

Finish: White urethane powder coat finish – hospital grade material and finish.

Lens: High impact, LED specific acrylic.

Drivers: High power factor constant current, 0.97 pf @ 120 V (Class 2, Class II).

Light Source: Samsung LED mounted to aluminum core linear boards.

Optional Ingress Barrier: IP65 rated fully enclosed CRS cover, with 3mm clear acrylic lens.

Specifications:

Voltage: 120 - 277 Volts

Standard Wattage: Ambient: 23W

Standard Light Output: Ambient: 2,650 lms

High Lumen Output: 3,050 lms

Dimming: 0 - 10 Volts, Standard 5% dimming; contact factory for 1% dimming, DALI options available

Color Quality: Standard 80 CRI, contact factory for 90 CRI

Standard Color Temperature: 3000K, 3500K, 4000K (contact factory for additional options)


Life of LEDs: L70 >100,000 hours

Listings: Certified to UL standards by ETL. Conforms to CSA standards as per ETL testing.

Warranty: Limited five (5) year warranty

Ordering Guide:

L - SEC22 -



For Example: L-SEC22-120-A100-L30-A-G-LVC-IB

Solar Eclipse Series 2' x 2', 120V, Ambient (standard lms), 3000 Kelvin, 80 CRI, Grid Mount, Low Voltage Controller, Ingress Barrier

Ordering Information:

Series	Voltage*	Functions	Color Temperature	CRI	Mounting	Switching	Options
L-SEC22	120	A100 Ambient (standard lms)	L30 3000K	A 80 CRI	F Flange Mount	000 No Switch (provided by others)	IB Ingress Barrier
	277	A200 Ambient (high lms)	L35 3500K	B 90 CRI	G Grid Mount	LVC Low Voltage Controller	NL Night Light
*Consult factory for 347 V requirement		AXYZ Custom Lumens	L40 4000K		S Surface Mount	LVD Low Voltage Controller with Dimming	IN Ingress Barrier & Night Light
			CXX Custom Temperature		LMS LightMaster without Dimming	00 No Options	
			LMD LightMaster with Dimming				

Standard Output:

Ambient = 2,650 lms, 23W

Lumen Multipliers:

CCT Multiplier	80 CRI	90 CRI
2700K	0.9	0.75
3000K	0.95	0.8
3500K	0.97	0.82
4000K	1	0.85

High Output:

Ambient = 3,050 lms, 27W

Dimensions:

